

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number
WO 2005/051681 A1

(51) International Patent Classification⁷: **B60B 27/02**,
5/02, 27/06

(74) Agent: **OCTROOIBUREAU KLAVERS B.V.**; Mark-
erkant 1201.20, NL-1314 AJ Almere (NL).

(21) International Application Number:
PCT/NL2004/000737

(22) International Filing Date: 19 October 2004 (19.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1024864 25 November 2003 (25.11.2003) NL

(71) Applicant (for all designated States except US): **GIANT
MANUFACTURING CO. LTD** [CN/CN]; Shun-Fam Rd.
19, Tachia Chen, Long Chuan Li, Taichung Hsien (TW).

(72) Inventor; and


(75) Inventor/Applicant (for US only): **VRIELINK, Johan**
[NL/NL]; De Morinel 55, NL-8251 HT Dronten (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: A WHEEL PROVIDED WITH A DRIVE-DEPENDENT, EXCHANGEABLE COUPLING ELEMENT

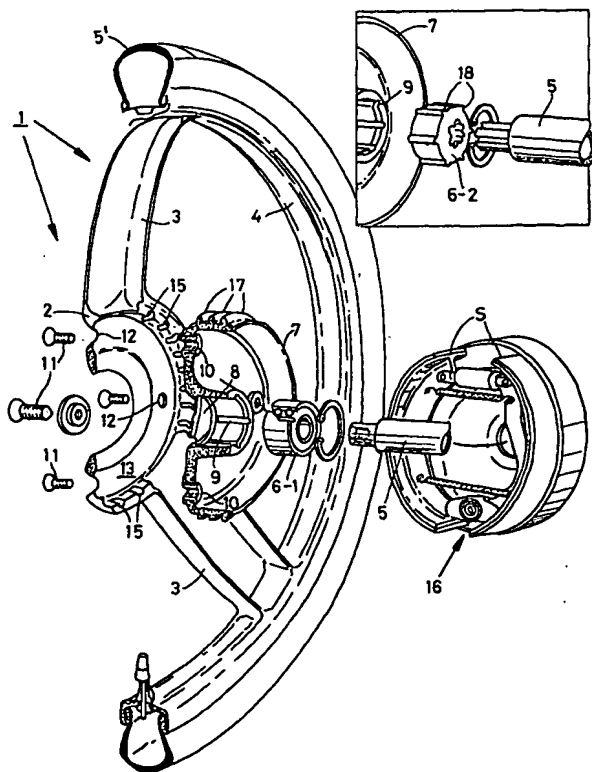

(57) Abstract: There is disclosed a wheel (1) that com-
prises a hollow central body (2), in which a coupling el-
ement (6) to be coupled to a wheel shaft (5) and to the
central body (2) is present. The coupling element (6) is a
coupling element that is exchangeable in dependence on
the fact whether the wheel shaft (5) is a driven shaft or
not. In the case of a wheel driven by the wheel shaft (5),
the wheel (1) comprises a insert (6-2) as the coupling el-
ement. In the case of a wheel (1) not driven via the wheel
shaft (5), comprises a shaft bearing (6-1) as the coupling
element. One and the same wheel can be used in a vehicle
as a driven wheel but also as a non-driven wheel, which
can be realised by exchanging the coupling element (6).
Furthermore the wheel can be used as a front wheel, but
also as a rear wheel.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*